

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 161 062 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.12.2001 Bulletin 2001/49

(51) Int Cl.7: H04M 1/02

(21) Application number: 01304196.7

(22) Date of filing: 10.05.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Finke-Anlauff, Andrea
38106 Braunschweig (DE)

(74) Representative: Read, Matthew Charles et al
Venner Shipley & Co.
20 Little Britain
London EC1A 7DH (GB)

(30) Priority: 31.05.2000 US 584297

(71) Applicant: NOKIA MOBILE PHONES LTD.
02150 Espoo (FI)

(54) Electronic device

(57) A full function keyboard is provided for use with a mobile communication device. The keyboard is constructed in two portions (10, 11) which may be pivoted relative to the body of the device between two positions.

one in which the keyboard is hidden and the keypad of the device is exposed for normal use and a second in which the two portions of the keyboard are positioned on opposite sides of the screen of the device to allow holding with both hands and operation with the thumb.

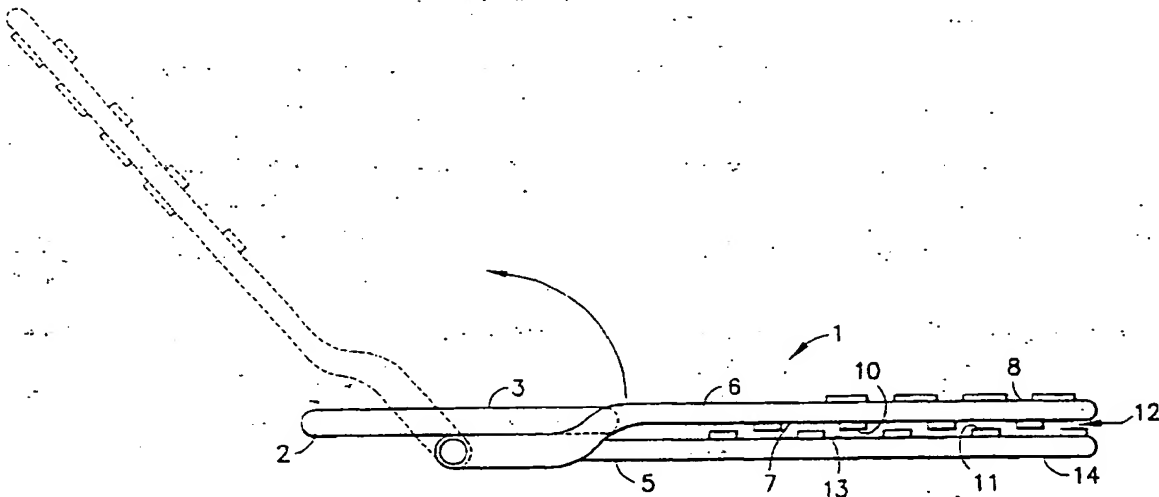


FIG. 3a

EP 1 161 062 A2

Description

[0001] The present invention relates to an electronic device, such as a mobile communications device.

[0002] Mobile telephones and similar communication devices are rapidly expanding in use and function. Such devices will soon provide Internet access, personal information management, facsimile, messaging, in addition to telephone communication. To accomplish this there is a need to provide keyboards compatible with the more complex applications to which the mobile device will be adapted. Full function keyboards, such as the standard QWERTY typing array of keys and buttons, are difficult to provide while maintaining the compact size required in the mobile device. Such devices on the market today are cumbersome and often require a separate belt pouch for carrying the mobile device on the person of the user. In addition it is necessary to coordinate on screen displays for adaptation to the variety of functions.

[0003] The present invention seeks to provide a simple and inexpensive means of providing a full function keyboard to accommodate the burgeoning applications to which a mobile communication device is adapted.

[0004] In an embodiment of the present invention mobile communication device is constructed having a body in which is mounted a viewing screen for displaying user interface communications. A first panel is fixed to the body and includes one half of a full function keyboard and a back cover. A second panel is pivotally mounted on the body for rotation between two positions, namely, a closed position and an open position. The second panel is constructed with inner and outer surfaces located on opposite sides of the panel which are positioned such that the inner surface faces the keyboard of the first panel and the outer surface is exposed in the closed position. In the open position, the second panel is pivoted approximately 180° so that the outer surface faces away from the user of the mobile device while the inner surface is exposed.

[0005] To enable the device to be operated as a communication device a communication keypad is constructed in the outer surface of the second panel. To provide the second half of the full function keyboard, the inner surface contains a keyboard which is operatively associated with the keyboard of the first panel in the open position. The screen remains exposed in each position of the second panel. The display which appears on the screen is oriented in a manner consistent with the position of panels.

[0006] The invention is described in more detail below with reference to the attached drawing in which:

Figure 1 is a top view of the communications device of this invention in the closed position;

Figure 2 is a top view of the communications device of this invention in the open position;

Figure 3a is a side view of the communications device of this invention in the closed position;

Figure 3b is a schematic illustration of the display orientation in the closed position;

Figure 3c is a schematic illustration of the display orientation in the open position;

Figure 4 is a block diagram of the control system of a communication device as it applies to this invention; and

Figure 5 is a top view of an alternative embodiment of this invention.

[0007] A mobile communication device is provided with a full function keyboard. For the purpose of illustration, this invention will be described with reference to a mobile telephone, but is applicable to other devices such as pagers, game units and the like. As shown in figure 3a, a mobile telephone 1 is constructed having a body 2. The body 2 encloses a screen 3 which provides a display 4 for communicating pertinent information to the user in response to actions by the user. The mobile telephone 1 is constructed having two panels 5 and 6 which are mounted on the body 2. In figure 3, panel 5 is shown fixed to body 2 as a separated component, but it could also be constructed integrally with body 2. Panel 6 is rotatable on the body 2 about an axis x-x as shown in figures 1 and 2.

[0008] In a first position, referred to as the closed position, panel 6 is rotated into overlapping alignment with panel 5, as shown in figure 3a. Rotating panel 6 has two opposing flat faces 7 and 8. Face 7 is the inner face when panel 6 is in the closed position and face 8 is the outer face in the closed position. In the preferred embodiment, face 8 contains a standard telephone keypad 9 for use when the mobile phone 1 is operating strictly in the communication mode. In the closed position, the device operates as a standard operating mobile telephone with the display 4 of screen 3 oriented in alignment with keypad 9.

[0009] To provide the full function keyboard of the preferred embodiment of this invention, the key and button array 12, used for the particular application, is divided in half and arranged on left and right keyboard portions 10 and 11. To facilitate operation of the keyboard, it is designed for thumb actuation by both hands. This makes it convenient to hold the small device in both hands and operate the keyboard portions 10 and 11 accurately and efficiently.

[0010] As shown best in figure 3, the left hand keyboard portion 10 is constructed on face 7 of rotating panel 6 on the opposite side of telephone keypad 9. The right hand keyboard portion 11 is constructed on upper face 13 of panel 5. A back cover is assembled on the face 14 of panel 5. To insure a compact engagement of

panels 5 and 6 in the closed position, the portions of key array 12 on the opposing panel faces 7 and 13 are offset to avoid interference in the closed position.

[0011] To operate the keyboard array 12, panel 6 is rotated approximately 180° to the open position to form a substantially flat unit having right and left keyboard portions separated by screen 3 as shown in figure 2. By holding the left and right hand portions in either hand, the keyboard, thus extended, can be conveniently operated using thumbs. In the open position, outer face 8 of panel 6 is oriented away from the user.

[0012] The display 4 of screen 3 is controlled for orientation in two positions depending on the mode of use. In the closed position, the display 4 is oriented in alignment with the keypad 9, while in the open position the display 4 is aligned with the function key array 12. As shown in figures 3b and 3c, display orientation is rotated 90° between the mobile telephone mode in which panel 6 is in the closed position to the full function mode when panel 6 is in the open position. This is accomplished by providing a panel position indicator 15 which signals control unit 16 when the panel 6 is opened or closed. Control unit 16 may be a microprocessor, display driver or other means including hardware or software. This could be automatic or by a manual button operated by the user. The control unit 16 will signal the display control 17 to orient the position of the display as needed. In addition, in the open position, keypad 9 will be locked in an inoperative mode by telephone keypad lock 18.

[0013] In an alternate embodiment shown in figure 5, instead of a keyboard, a game controller keypad is provided. The game keyboard consists of action buttons 19 and motion pad 20 constructed in panels 5 and 6 respectively. The telephone keypad 9 is constructed in the reverse side of panel 6, as described above. As a further alternative, the device could be designed without a communication capability and used as a game unit only.

[0014] In this manner, a simple and compact keyboard is provided in operative association with a mobile communications device. It should be noted that other key arrays can be used such as the French AZERTY or the German QWERTZ(U). The device would also be useful as a microprocessor based game unit driven by game software or firmware.

Claims

1. An electronic device for operation in multiple applications comprising:
 - a body element having upper and lower faces relative to usage;

- a screen constructed in the upper face of said body element to provide a visible display of information to the user;

- a first panel fixed to the upper face of said body

element;

- a second panel mounted on the body element for pivotal motion thereon between open and closed positions, said second panel having first and second faces; said first face accessible to the user in said closed position and said second face accessible to the user in said open position; and

- a function keyboard constructed in two portions, a first portion constructed in the second face of said second panel and a second portion constructed in said first panel, each of said function keyboard portions having an array of keys consistent with a selected function, wherein said function keyboard is exposed for operative use in the open position.

2. An electronic device according to claim 1, wherein said first and second panels are in overlapping alignment in the closed position and wherein said first and second panels are on opposite sides of said screen in the open position.
3. An electronic device according to claim 1 or 2, wherein said function keyboard comprises a full function QWERTY key array split in first and second portions constructed respectively in said first and second panels.
4. An electronic device according to any preceding claim, wherein said function keyboard comprises a game controller with multiple functions keys divided between said first and second panels.
5. An electronic device according to any preceding claim, wherein said array of keys on said faces of said panels are offset to prevent interference between the keys of said faces in the closed position.
6. An electronic device according to any preceding claim, wherein said device is mobile communication device and further comprises a communication keypad constructed on said first face of said second panel, said keypad being exposed for operative use in the closed position.
7. An electronic device according to claim 6, further including a control unit, said control unit operating to rotate the orientation of the display on the screen consistent with the functional position of the first and second panels so that it is aligned with said communication keypad in the closed position and aligned with said functional keyboard in said open position.
8. An electronic device according to claim 7, wherein

the display on the screen is rotated 90° between said open and closed positions.

9. An electronic device according to claim 7 or 8, wherein said orientation is controlled by the position of the second panel.

10. An electronic device according to any one of claims 6 to 9, wherein the communication device keypad is locked in an inoperative mode in the open position.

11. A function keyboard for use in a mobile communications device, said communications device having a body element, a communications keypad, and a screen for displaying information to the user, said keyboard comprising:

a first panel fixed to the body element having upper and lower faces;

a second panel mounted on the body element for pivotal motion thereon between open and closed positions, said second panel having first and second faces; wherein said communication keypad is constructed on the first face of said second panel, said keypad being exposed for operative use in the closed position; and

wherein said function keyboard is constructed in two portions, a first portion constructed in the second face of said second panel and a second portion constructed in the upper face of said first panel, each of said function keyboard portions having an array of keys consistent with a selected function; wherein said function keyboard is exposed for operative use in the open position.

12. A mobile communications device for operation in multiple applications comprising:

a body element having upper and lower faces relative to usage;

a screen constructed in the body open to provide a visible display of information to the user;

a first panel fixed to the upper face of said body element;

a second panel mounted on the body element for pivotal motion thereon between open and closed positions, said second panel having first and second faces; said first face accessible to the user in said closed position and said second face accessible to the user in said open position;

a communication keypad constructed on the first face of said second panel, said keypad being exposed for operative use in the closed position; and

a function keyboard constructed in two portions, a first portion constructed in the second face of said second panel and a second portion constructed in said first panel, each of said function keyboard portions having an array of keys consistent with a selected function, wherein said function keyboard is exposed for operative use in the open position.

13. A function keyboard for use in an electronic device, said device having a body element, and a screen for displaying information to the user, said keyboard comprising:

a first panel fixed to the body element having upper and lower faces;

a second panel mounted on the body element for pivotal motion thereon between open and closed positions, said second panel having first and second faces; and

wherein said function keyboard is constructed in two portions, a first portion constructed in the second face of said second panel and a second portion constructed in the upper face of said first panel, each of said function keyboard portions having an array of keys consistent with a selected function, wherein said function keyboard is exposed for operative use in the open position.

14. A function keyboard according to claim 13, wherein said first and second panels are in overlapping alignment in the closed position and wherein said first and second panels are on opposite sides of said screen in the open position.

15. A function keyboard according to claim 13 or 14, wherein said portions of said function keyboard cooperate to form a full function QWERTY key array split in said first and second portions.

16. A function keyboard according to any one of claims 13 to 15, wherein said portions of said function keyboard comprises a game controller with multiple functions keys divided between said first and second panels.

17. A function keyboard according to any one of claims 13 to 16, wherein said array of keys on said faces of said panels are offset to prevent interference between the keys of said faces in the closed position.

18. A function keyboard according to any one of claims 13 to 17, wherein, said device is mobile communication device and further comprises a communication keypad constructed on said first face of said second panel, said keypad being exposed for operative use in the closed position. 5
19. A function keyboard according to claim 18, further comprising a control unit, said control unit operating to rotate the orientation of the display on the screen consistent with the functional position of the first and second panels so that it is aligned with said communication keypad in the closed position and aligned with said functional keyboard in said open position. 10 15
20. A function keyboard according to claim 18 or 19, wherein the display on the screen is rotated 90° between said open and closed positions. 20
21. A function keyboard according to claims 18, 19 or 20, wherein said orientation is controlled by the position of the second panel. 25
22. A function keyboard according to any one of claims 18 to 21, wherein the communication device keypad is locked in an inoperative mode in the open position. 30
23. An electronic device comprising first and second wing portions (2, 5, 6) hingedly coupled to each other: 35
- said first and second wing portions (2, 5, 6) having first and second opposable surfaces (13, 7) respectively;
 - said second wing portion (6) also having a reverse surface (8) from said second surface (8);
 - said first surface (13) of said first wing portion (2, 5) supporting display means (3) and a first user interface means (11);
 - said second surface (7) of said second wing portion (6) supporting a second user interface (10); and
 - said reverse surface (8) of said second wing portion (6) supporting a third user interface (9); 40 45
- whereby
- in an open position said display means (3) is viewable and said first and second user interfaces (10, 11) are exposed so as to be operable by the user and
 - in a closed position said display means (3) is still viewable and said third user interface (9) is exposed so as to be operable by a user. 50 55
24. A telecommunications device comprising first and second hingedly coupled panels (2, 5, 6) closeable onto one another with facing surfaces (7, 13) defin-

ing an application user interface (10, 11) which can be revealed by hingedly opening the panels, and another surface (8) of the panels defining a telephone keypad (9) for use when the panels are hingedly closed, and a display device (3) connected to the panels such that it can be viewed with the panels either open or closed.

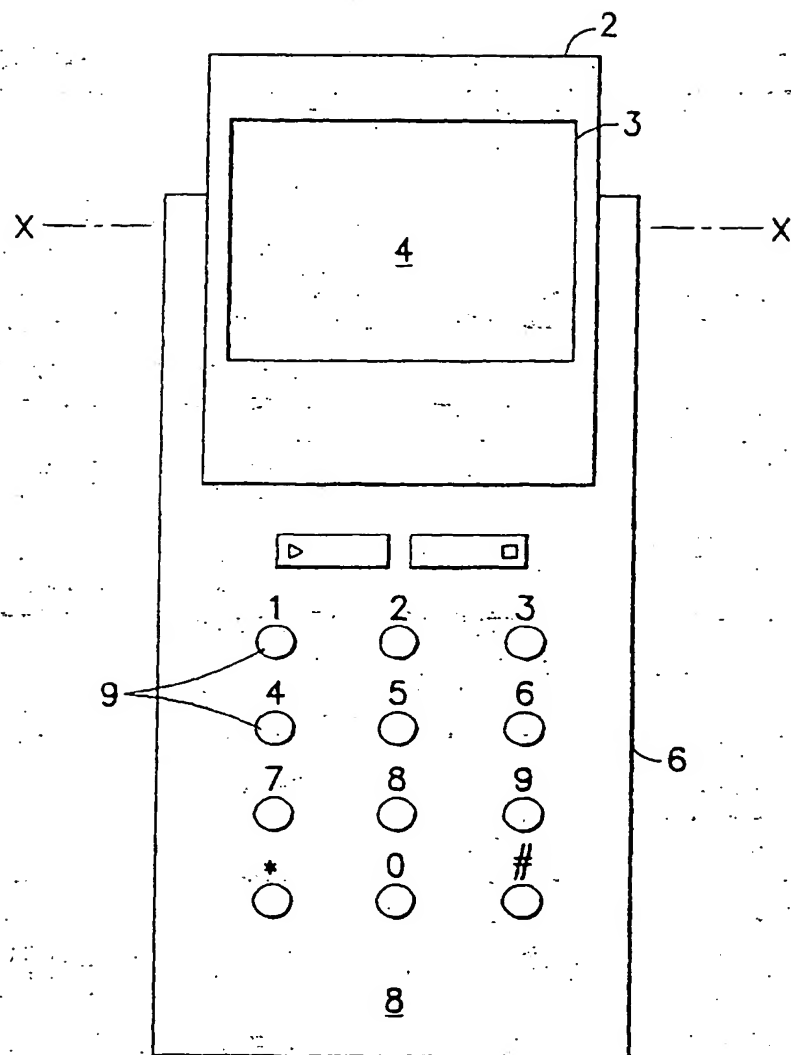
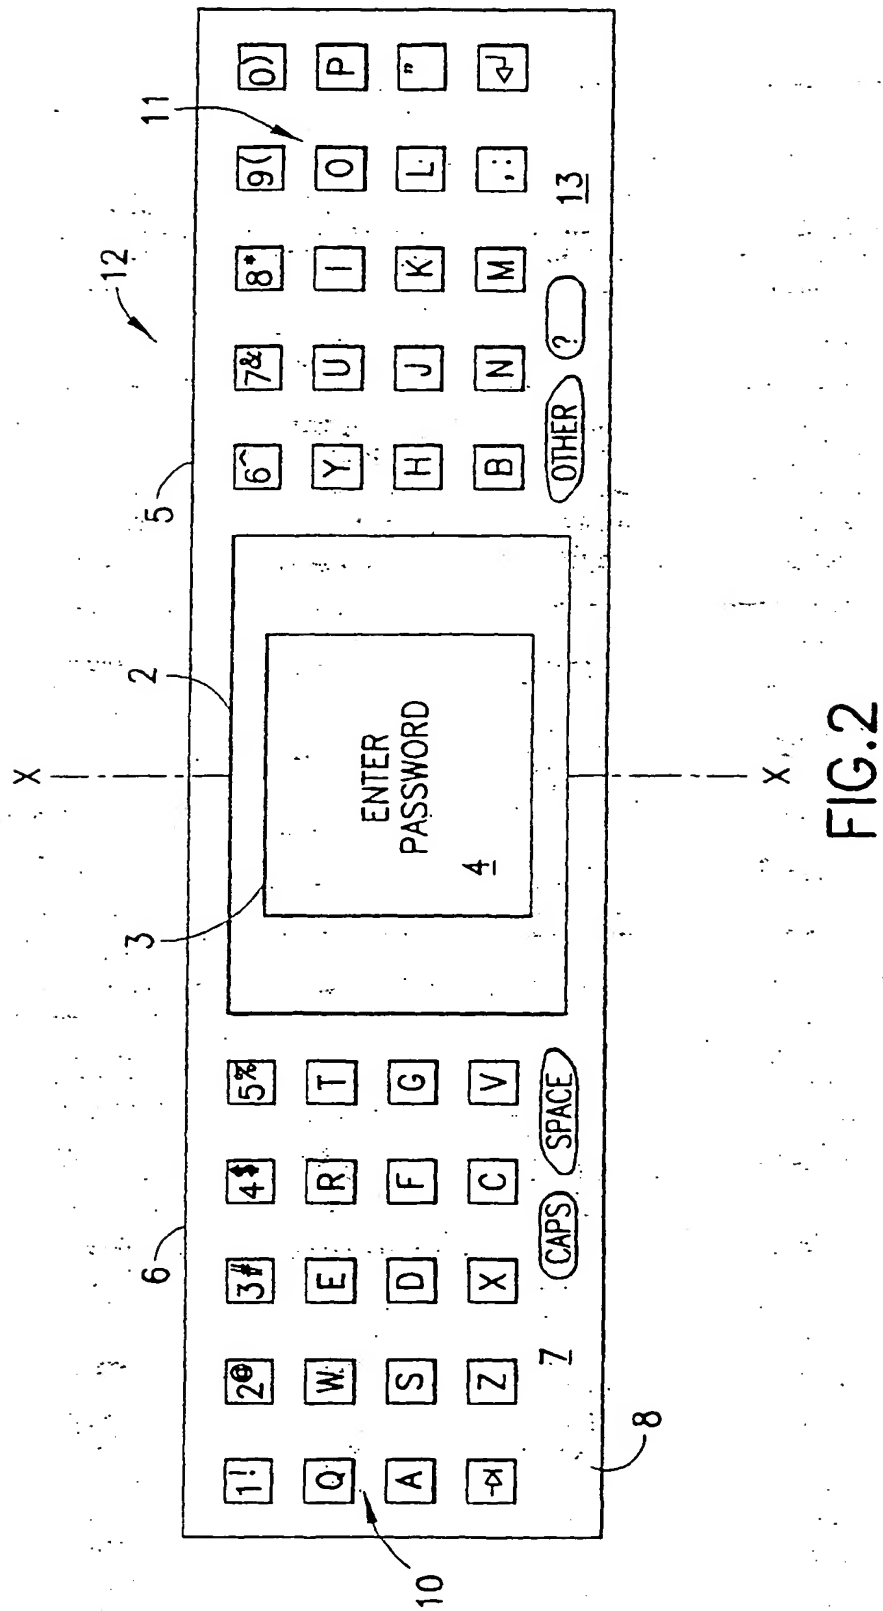


FIG. 1



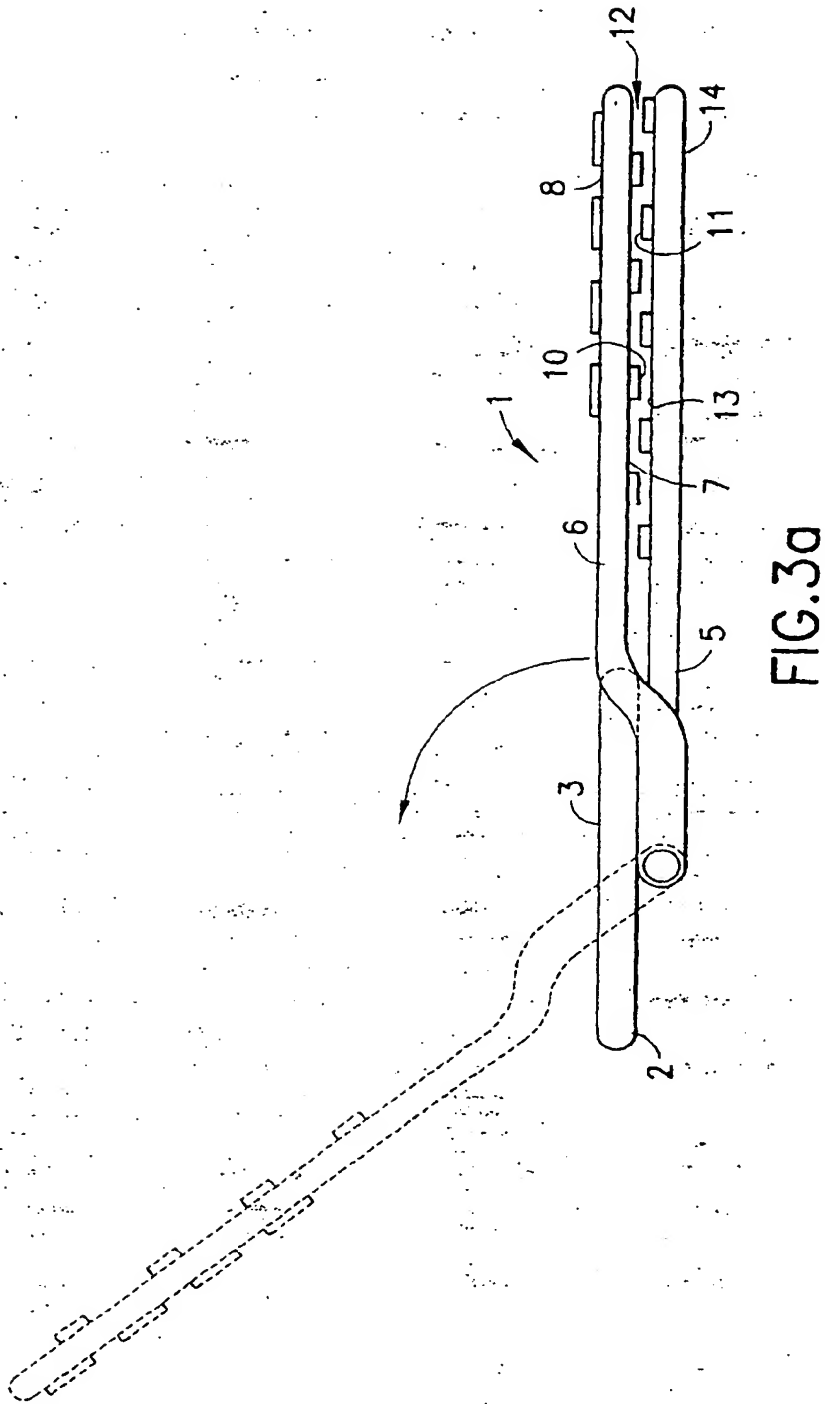


FIG. 3a




FIG. 3b




FIG. 3c

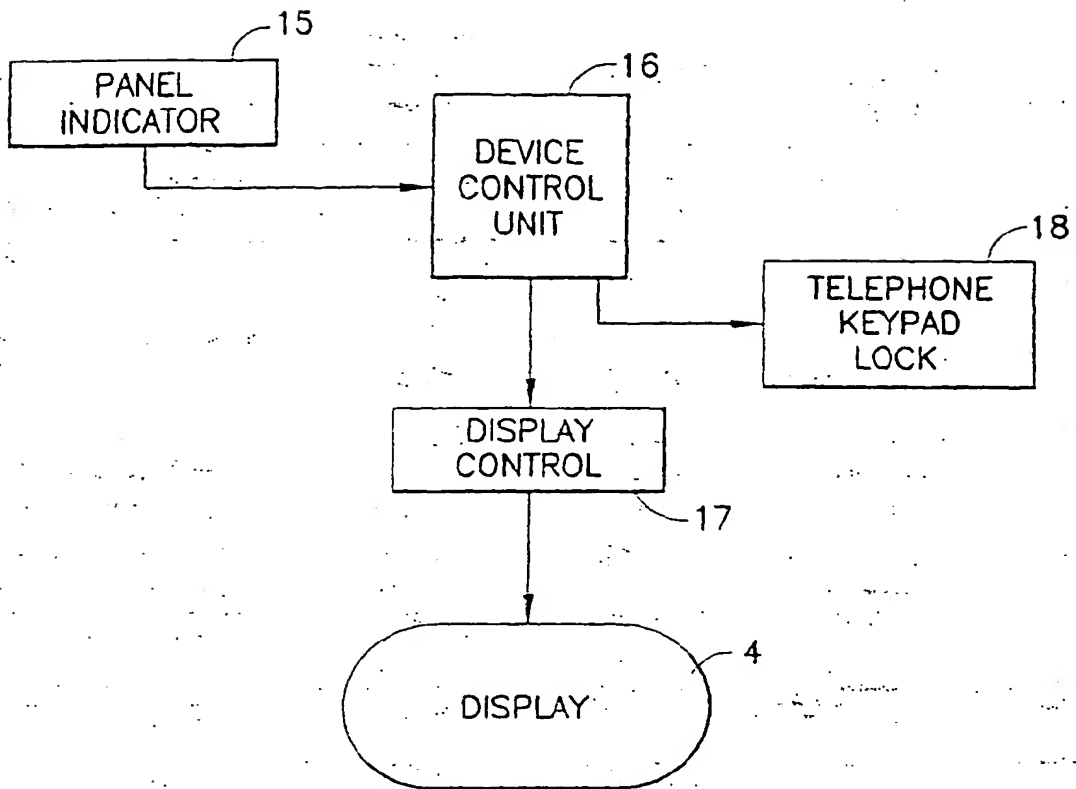


FIG. 4


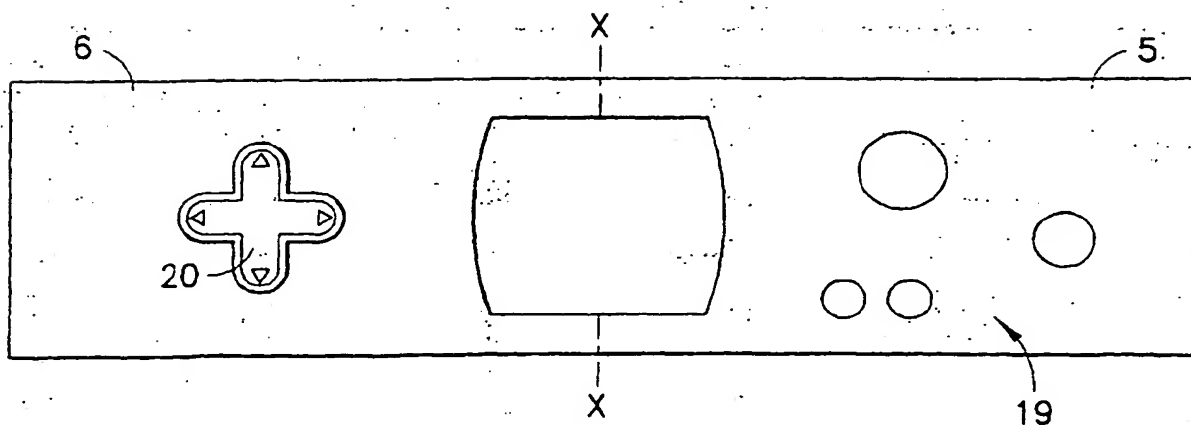


FIG. 5



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 161 062 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
27.11.2002 Bulletin 2002/48

(51) Int Cl.7: **H04M 1/02, H04M 1/23,
G06F 3/02**

(43) Date of publication A2:
05.12.2001 Bulletin 2001/49

(21) Application number: **01304196.7**

(22) Date of filing: **10.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Finke-Anlauff, Andrea**
38106 Braunschweig (DE)

(74) Representative: **Read, Matthew Charles et al**
Venner Shipley & Co.
20 Little Britain
London EC1A 7DH (GB)

(30) Priority: **31.05.2000 US 584297**

(71) Applicant: **Nokia Corporation**
02150 Espoo (FI)

(54) **Electronic device**

(57) A full function keyboard is provided for use with a mobile communication device. The keyboard is constructed in two portions (10, 11) which may be pivoted relative to the body of the device between two positions,

one in which the keyboard is hidden and the keypad of the device is exposed for normal use and a second in which the two portions of the keyboard are positioned on opposite sides of the screen of the device to allow holding with both hands and operation with the thumb.

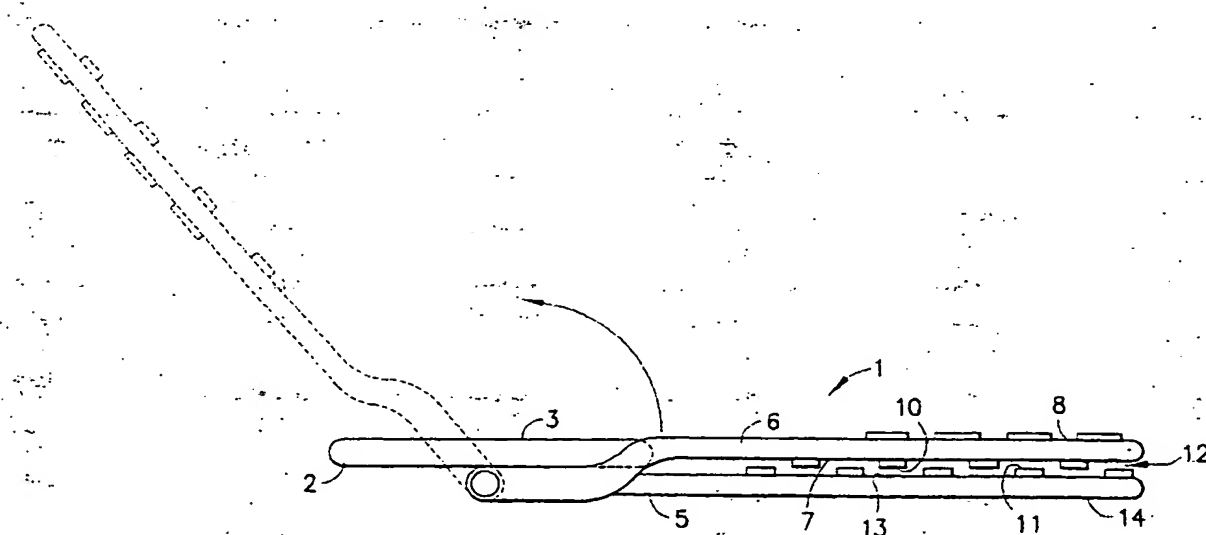


FIG.3a

EP 1 161 062 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 4196

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 933 908 A (NOKIA MOBILE PHONES LTD) 4 August 1999 (1999-08-04) * column 3, line 40 - column 4, line 54; figures 1,2 * * column 5, line 3-5; figure 4 * * column 5, line 25-47 * * column 6, line 17-24 *	1,3, 6-13,15, 18-24	H04M1/02 H04M1/23 G06F3/02
A	---	2,14	
X	WO 98 19225 A (RIDDIFORD MARTIN PHILIP THEREFORE LIMITED (GB)) 7 May 1998 (1998-05-07) * page 6, line 21 - page 7, line 12; figures 1,2 * * page 8, line 13-33 *	1,3,6, 11-13, 15,18, 23,24	
A	WO 98 19434 A (ERICSSON GE MOBILE INC) 7 May 1998 (1998-05-07) * page 2, line 1-26; figures 1-3 *	1,6, 11-13, 23,24	
A	EP 0 997 810 A (SONY COMP ENTERTAINMENT INC) 3 May 2000 (2000-05-03) * abstract * * column 9, line 36-51; figure 5 * * column 11, line 12-27; figure 17 *	4,7,16, 19	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04M G06F
A	FR 2 775 857 A (PHILIPS ELECTRONICS NV) 10 September 1999 (1999-09-10) * abstract; figures 1A,1B,1C * * page 5, line 24-34; figure 4 *	5,17	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 October 2002	Examiner de Biolley, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document			

FPO FORM 1503 03 82 (Pct01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 4196

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-10-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0933908	A	04-08-1999	FI 980199 A	30-07-1999
			EP 0933908 A2	04-08-1999
			JP 2000124977 A	28-04-2000
WO 9819226	A	07-05-1998	AT 205612 T	15-09-2001
			AU 730918 B2	22-03-2001
			AU 4786597 A	22-05-1998
			DE 69706695 D1	18-10-2001
			DE 69706695 T2	04-07-2002
			EP 0932861 A1	04-08-1999
			ES 2164332 T3	16-02-2002
			WO 9819226 A1	07-05-1998
			JP 2001503172 T	06-03-2001
			NZ 335445 A	28-01-2000
WO 9819434	A	07-05-1998	AU 4919297 A	22-05-1998
			WO 9819434 A1	07-05-1998
EP 0997810	A	03-05-2000	JP 2000200250 A	18-07-2000
			AU 5595199 A	04-05-2000
			BR 9905128 A	05-09-2000
			CN 1252574 A	10-05-2000
			EP 0997810 A2	03-05-2000
			NZ 500500 A	23-02-2001
			TW 456116 B	21-09-2001
FR 2775857	A	10-09-1999	FR 2775857 A1	10-09-1999
			CN 1233127 A	27-10-1999
			EP 0940962 A1	08-09-1999
			JP 11346258 A	14-12-1999
			US 2002041490 A1	11-04-2002
			US 2001012195 A1	09-08-2001

EPO FORM P0153

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82